

FIBER SPLICING

SINGLE FIBER CLEAVER WITH FIBER COLLECTOR




DESCRIPTION

OFC-36K-C is a handy, portable and ease to use cleaver. With its robust and stable high quality platform, consistent high quality cleaving of single fiber becomes possible.

OFC-36K-C comes with a single fiber adapter for 0.25 to 0.9mm coated single fibers.

OFC-36K-C is ideal for use with fusion splicing or other precision applications, setting a new standard for flexibility and performance.

The OFC-36K-C is available with a single fiber adapter for 250 to 900 micron coated single fibers. It is a simple operation for the user to remove or install the single fiber adapter and alternate between mass and single fiber cleaving.

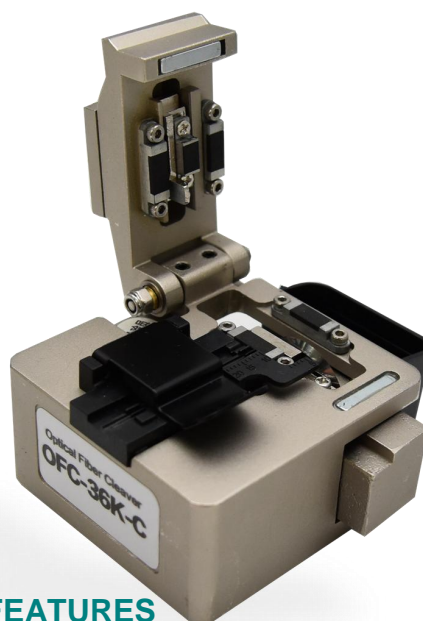

FEATURES

- Used for single fiber cleaving and compatible with ribbon fiber cleaving
- Reduced cleaving steps and better cleave consistency by utilizing auto anvil drop
- Double scoring prevention
- Blade height and rotational adjustable
- Minimal steps operation

ACCESSORIES

- Single Fiber Adapter (250µm & 900µm)
- Cleaver Blade

SPECIFICATIONS

Dimensions (W x L x H) (mm)	57x58x49
Weight (g)	257
Coating Diameters (mm)	0.25 - 0.9 (Single Fiber)
Cladding Diameter (mm)	0.125
Cleave Lengths (mm)	10
Typical Cleave Angle (°)	0.5
Typical Blade Life	36,000 Fiber Cleaves
Number of Steps for Cleave	3
Blade Adjustments	Rotational & Height
Fiber Collector	Yes

ORDERING INFORMATION

Part No	Description
OFC-36K-C	Single Fiber Cleaver with Fiber Collector
AX-36K-CB	Fiber Cleaver Replacement Blade

Remark : For Ribbon Fiber Cleaver, please contact us at sales@kabex.com.my

Note : Specifications are subject to change without prior notice